

ServiceInfo 1/2026

Vipiteno, January 2026

Update on Proper Closing of Station Panels

Dear Customers,

This communication aims to provide important information to ensure safety in the station, **particularly in situations where personnel need to move over the station's cladding panels.**

Please pay special attention to **the lower cladding panel equipped with a handle.** Specifically, we ask you to check:

- The panel must be **properly closed.**
- The lock must be **secured with the key.**



Fig.1 Panel locked with key

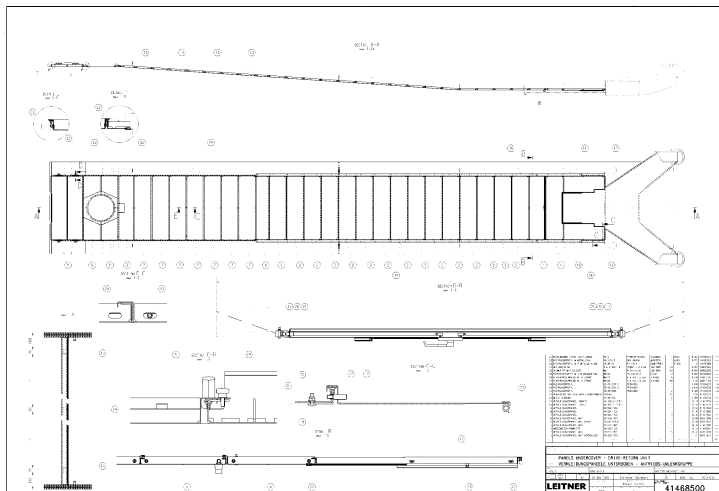


Fig.2 Example drawing of the station's lower cladding

These instructions are essential to prevent accidental openings and ensure operator safety.

LEITNER®

OUR CUSTOMER SERVICE HOTLINE

Available 365 days / 24 hours

Mechanical Hotline +39 335 6156050
Electrical Hotline+39 335 6514386

Customer service

+39 0472 727711
customer.service@leitner.com

1 / 2

ServiceInfo 1/2026

We also remind you that the lower cladding panels are tested according to the **DIN EN ISO 13107** standard, and the permissible loads are listed below:

1. 2 kN/m² (distributed load value)
2. 2 kN (point load value on a surface of 200 x 200 mm)

Should you have any questions, please do not hesitate to contact us.

Best regards,
LEITNER Customer Service